nora nTx

Saves time and money



With nora® nTx you can lay floorings quickly and easily in a few simple steps - with no waiting time.

Efficient nora® nTx floorings can be laid directly on existing surfaces -

nora® nTx floorings can
be laid directly on existing surfaces –
even with high levels of residual
moisture – and can be used
immediately.



Economical

Laying nora® nTx floorings reduces downtime, saves costs and minimises the risk of errors.

... when time is a decisive factor

In some situations, renovations and the downtime they cause can result in very high costs. In hospitals, for example, it's simply not possible to interrupt work or close wards.

Kindergartens, schools and universities all have very restricted time windows for renovations. In production facilities or office buildings too, even temporary closures are often impossible.

When time is a decisive factor, nora® nTx is the perfect solution. Whether new builds or renovations, choosing

nora® nTx saves you time and money. And you also get to benefit from the high quality and reliability of nora® rubber flooring systems.

nora® nTx combines the proven properties of nora® products – elasticity, durability and easy cleaning – with innovative installation technology. This self-adhesive flooring can be used immediately after laying and offers professionell installers new application areas.

Visit www.ntx.nora.com and decide for yourself!

nora systems Shanghai Co. Ltd.

10 A/B, Long Life Building | 1566 Yan'an Road West | 200052 Shanghai, PR China Tel.: +86 21 - 3226 0077 | Fax: +86 21 - 5258 1958 www.nora.com/cn

nora systems GmbH (DMCC Branch)

2008 HDS Business Centre | Jumeirah Lakes Towers | PO Box 478392 | Dubai, UAE Tel.: +971 (4) 450 8175 | Fax: +971 (4) 450 8374 E-Mail: info@nora.com www.nora.com/corp

nora flooring systems UK Ltd.

4-5 Allerton Road | Rugby CV23 OPA, Great Britain Direct Dial Numbers: (01788) 513 160 - 513 169 Fax: (01788) 55 28 12 E-Mail: info-uk@nora.com www.nora.com/uk

nora systems GmbH


Hoehnerweg 2-4 | 69469 Weinheim, Germany Tel.: +49 (0) 6201 - 80 66 33 E-Mail: info@nora.com www.nora.com



It's a question of time





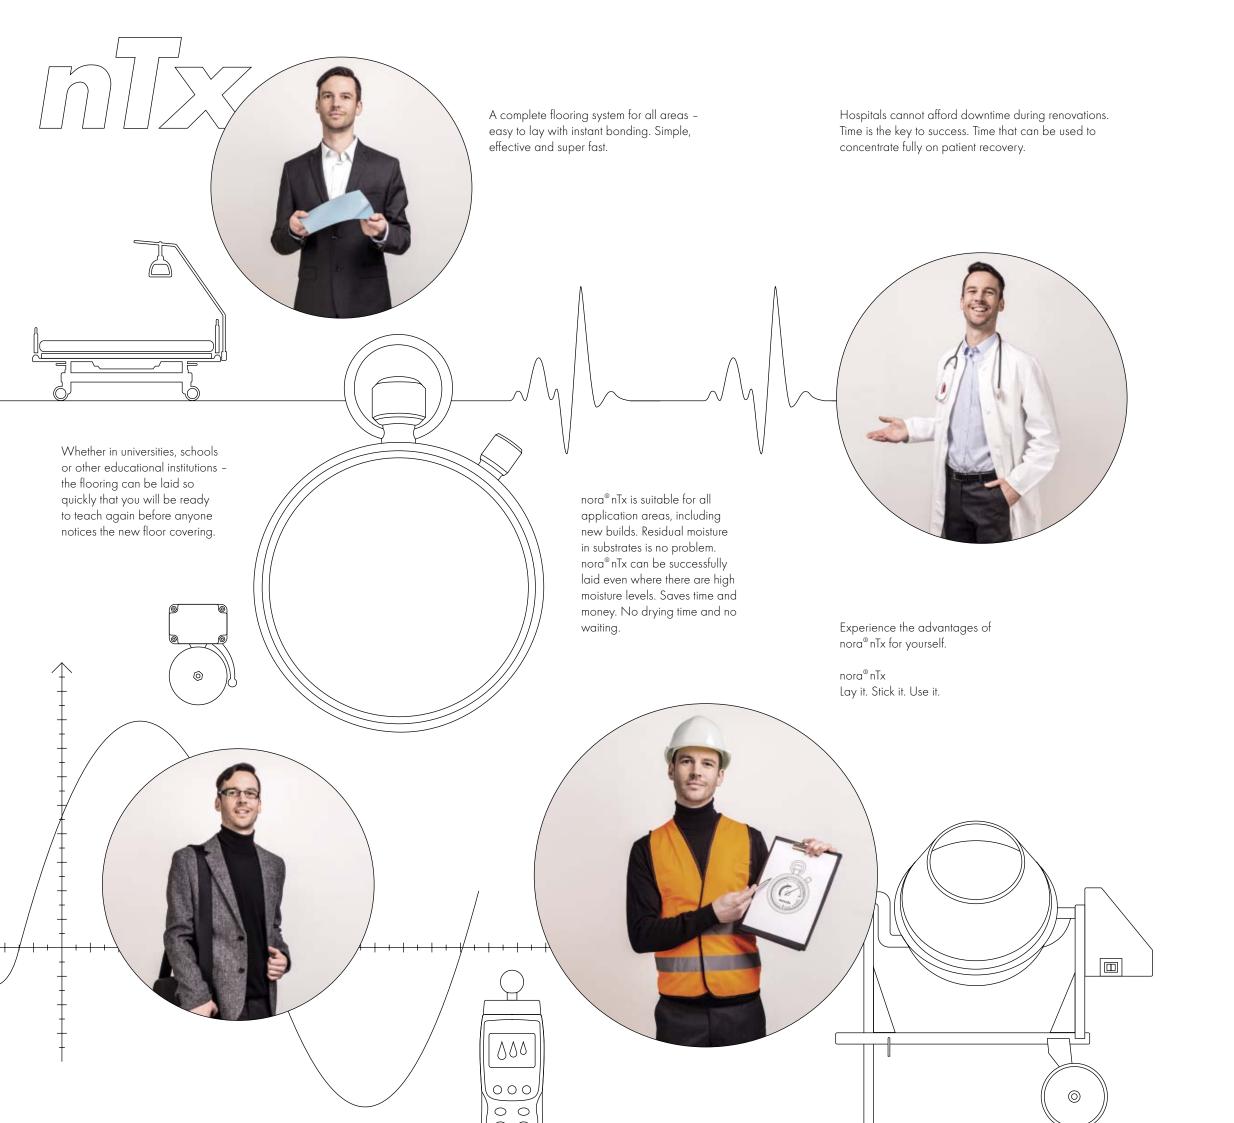



nora® nTx is a new and unique technology for professional installers to lay nora®rubber flooring systems.

Because the powerful adhesive is factory-fitted, nora® nTx is as simple as it is ingenious. In a few simple steps, the flooring can be cleanly and safely installed and used immediately. It can be laid on all common concrete or cement screed surfaces, as well as directly on top of existing floorings. Even high levels of residual moisture in the screed are no problem for nora®nTx.

The challenges of conventional laying processes - such as applying the correct amount of adhesive or ensuring sufficient wetting, drying and waiting time before and after laying - are all a thing of the past. And the result is just as durable, sturdy and safe as you would expect from nora® floor coverings. No other rubber floorings offer so many time and cost savings for contractor and building users alike. All from a single supplier.

nora® nTx is available for noraplan® sentica, signa, unita, eco and stone. nora also offers a comprehensive range of installation materials and tools to ensure clean and safe substrate preparation.



You can find more information and details about the benefits of our nora®nTx flooring system

at www.ntx.nora.com

nora nTx

Features and benefits at a glance

• Fast and simple laying in just a few steps

No need to interrupt your daily work

• Can be used immediately after laying

• Complete system from a single supplier

of buildings with shared-use areas

• Minimised downtime - economical for operators

No drying or waiting time

• Even works perfectly with high residual moisture levels


• Can be directly laid on existing floor coverings




~ 1.22 m x 14.8 m Art. 155A / 3.0 mm



~ 1.22 m x 11.8 m



noraplan® eco nTx Art. 158A / 2.0 mm



noraplan® unita nTx Art. 1698 / 2.0 mm With discretely dispersed granite chips

- 12* Art. 1699 / 2.0 mm With glimmering dispersed

4*

~ 1.22 m x 14.8 m

3 16* ~ 1.22 m x 14.8 m


For perfect substrate preparation, we offer a variety of nora®nTx installation materials. These have been developed specifically for the installation of nora®nTx floorings.

The perfect match between installation materials and flooring ensures functional safety and guarantees the highest standard of quality. In addition, all nora®nTx installation materials can also be used at higher residual moisture levels in the substrate.

nora®nTx 010: Stable filler

nora®nTx 015: Filler

nora®nTx 020: 1-C primer



noraplan® stone nTx Art. 145A / 2.0 mm Reflection-breaking surface Art. 147A / 2.0 mm Smooth surface ~ 1.22 m x 14.8 m

* You can view our complete colour palette at www.nora.com