



or download our DOSTRON app refer to your Manual on www.dosatron.com For complete information on the features and operations,

Saton Tnatroqmi

Please read the following important information. Congratulations on your new Dosatron.

GREEN LINE 30 m³/h · 132 US GPM **D30** GF **GUICK START UP**



CAUTION

- When connecting a DOSATRON either to the public water supply or to its own water source, you must respect the regulations in force concerning protection of the source i.e. backflow prevention, etc.
- Contact local authorities for requirements of backflow prevention.
- When installing, operating, and maintaining the DOSATRON water powered metering pump, keep safety considerations foremost. Use proper tools, protective clothings, and eye protection when working on the equipment and install the equipment with a view toward ensuring safe operation.
- Follow the instructions in the manual and take additional safety measures appropriate to the liquid being pumped and the temperature of the water that powers the DOSATRON. Be extremely careful in the presence of hazardous substances (e.g. corrosives, toxins, solvents, acids, caustic, flammables, etc.).
- Before applying any aggressive chemicals, please consult your distributor to confirm compatibility with the dosing pump.

Hand tighten. No tools needed.

in dromain does not form a contractual engagement on the part of Dosatron International and is for indimation only appearance without prior notice.

Site web: www.dosatronusa.com

Tel. 1-727-443-5404 / 1-800-523-8499 - Fax 1-727-447-0591 2090 SUNNYDALE BLVD, CLEARWATER - FL 33765 - USA

розаткои інтернатіонаг інс.

(АЗІЯЗМА ЈАЯТИЗЭ & НТЯОИ) CUSTOMER SERVICE - SERVICE CLIENTÈLE





info@dosatron.com - www.dosatron.com Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85 Rue Pascal - B.P. 6 - 33370 TRESSES (BORDEAUX) - FRANCE Tel. 33 (0)5 57 97 11 11

Certified QEH&S System

роѕаткои інтекнатіонае з.а.з.

Manufactured by - Fabriqué par :

CUSTOMER SERVICE - SERVICE CLIENTÈLE (WORLDWIDE - EUROPE)

RECOMMENDATIONS

DO NOT USE THIS UNIT WITHOUT A 80-130 MICRON [200-120 MESH] WATER FILTER* OR YOUR WARRANTY WILL BE VOID.


*The 80-130 micron [200-120 mesh] water filter (sold separately) protects your unit from debris in the water that causes scoring to the piston and housing.


KNOW YOUR WATER FLOW! GRADUALLY TURN ON THE WATER.

COUNT THE NUMBER OF CLICKS IN 15 SECONDS. DO NOT EXCEED 46* CLICKS.

CLICK CHART

OLION OTTAKT	
1250	
2500	
5000	
10000	
20000	
30000	



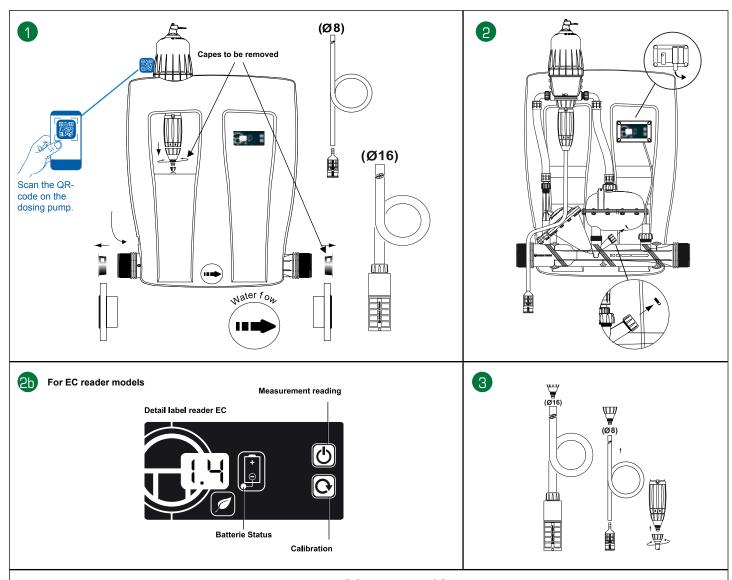

Maximum: 46 clicks/15 sec.

